



## HospiTouch Alphanumeric keyboard with glass surface



### Description

HospiTouch is an alphanumeric keyboard with a glass surface for use in medical applications. Special capacitive sensors execute the relevant key codes when the surface is touched. For optimum use, this keyboard is also equipped with an integrated glide pad. The technology used can also be operated when wearing surgical gloves. The surface is resistant to acid, hand perspiration, dust and fluids.

This keyboard has been specifically designed with medical technology in mind, but is also ideal for use in other environments with unfavourable environmental conditions.

### Features

- Cleaning function (keys deactivated)
- Acoustic feedback (4 levels of adjustment)
- 18 mm key grid
- Water-resistant
- Wear-resistant lettering
- Sensitivity can be adjusted on 4 levels

### Reliability

- > 100 million operations per key
- Protected against low pressure water jets
- Shockproof
- Can be easily cleaned with disinfectant agents

PrehKeyTec GmbH is a leading international manufacturer of high-quality data input systems. Products include modular standard keyboards which are particularly suitable for professional use due to their high level of flexibility and extreme reliability.

## HospiTouch Technical Data

### Key layout

- German or US international layout (other national layouts available on request)
- 18 mm key grid
- Integrated touchpad with mouse buttons

### PC connection

- USB interface (~50 mA)
- No special drivers required (as keyboard registers as an USB device)

### Operating systems

- Windows® 2000 and above, Linux

### Features

- 3 status LEDs (NUM, CAPS und SCROLL)

### Dimensions

- 387 mm x 140 mm x 27 mm (W x D x H)

### Radio interference


- The device complies with the limit values of the following standards with regard to radio interference:
  1. CE
  2. EN55022, FCC Part 15 Subpart B Class A  
Electrostatic discharge DIN EN 61000-4-2,  
After test  $\pm 15$  kV Air- and  $\pm 8$  kV contact discharge  
Electromagnetic field DIN EN 61000-4-3, 10 V/m.
  3. EN 60601-1-2

### Temperature ranges

- Operating temperature -10°C to +40°C

### Protection types

- IP 65 for the keyboard

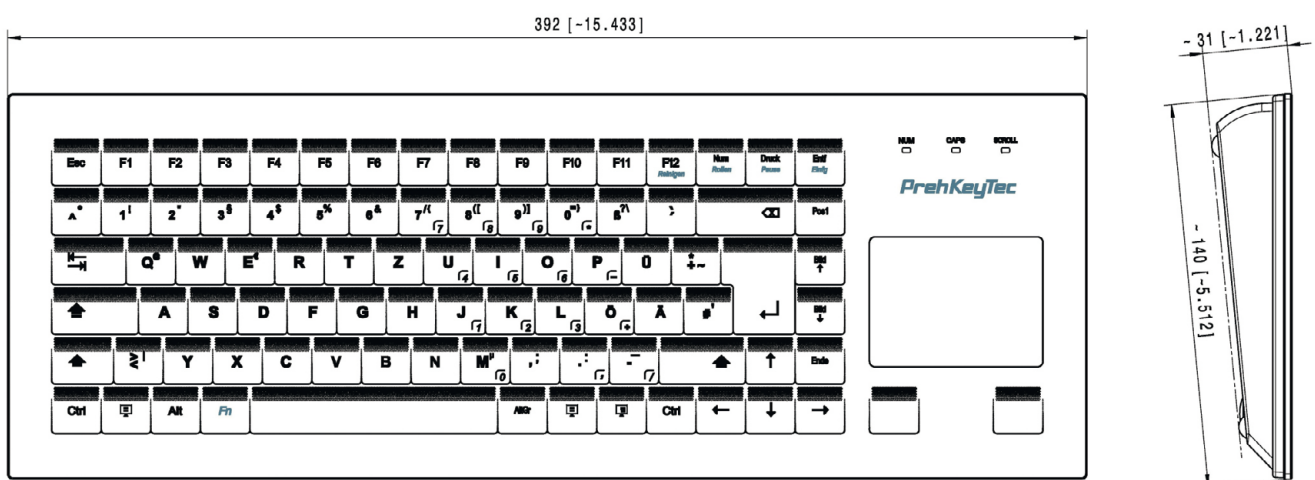

Subject to alterations 04/10 RI



800 729 0236  
www.logiscenter.us



0241 9550 9225  
www.logiscenter.de



01 82 88 44 70  
www.logiscenter.fr



020 3318 8265  
www.logiscenter.co.uk



0720 115814  
www.logiscenter.at



02 58 80 583  
www.logiscenter.be



911 433 048  
www.logiscenter.com



02 4792 1697  
www.logiscenter.it



308 800 842  
www.logiscenter.pt

## About LOGISCENTER

Logiscenter is the leading provider of automatic identification and data capture equipments. Our products include barcode printing and reading devices, mobile computing devices, wireless access points, identification cards, and consumables.

## Reasons to work with us

**Our customers come first.** Our objective is not only selling our products but also holding a long-lasting relationship with our customers, based on the benefits and advantages we create for you and your company.

**The best brands.** We offer products from the best manufacturers worldwide.

**Expert technical support team.** Our support staff are experts in the products we sell. But not just the products, they can tell you the best solution for your particular problem or need.

**Largest stock.** We have a permanent stock of more than 60,000 products.

**Same-day shipping.** For all orders placed and confirmed before 16:00 on working days.

**Best prices.** With Logiscenter, you can be sure that you are paying a fair price for your products, we will not overcharge you.

**Easy returns.** Damaged or defective products can be returned easily, for an exchange or reimbursement.



## All Brands Technical Service


## Our Brands




## Solutions for: Industry • Consumer • Mobility Transportation and Logistics • Retail • Health



Label printers



Barcode readers



Data terminals & PDA



PVC card printers



RFID



Consumables  
(labels, ribbons, PVC cards)