

CognitiveTPG

DLXi Thermal Desktop Label Printer


Field Proven Reliability, Workhorse Performance, Latest Industry Features for Versatility Across Many Industries and Applications



“Built to last... designed to connect”

Robust and rugged are the hallmarks of our thermal label printers. The DLXi combines this legendary reliability with the latest communication interfaces and performance. Designed to operate in challenging environments, the DLXi offers an easy to use and seamless migration from our earlier models.

- Same metal frame and construction of legacy printers
- Most combined interfaces on one unit, including a standard USB-A Host port
- Fast print speeds up to 5 inches per second (127 mm/sec)
- CPL, EcPL and ZcPL programming language resident
- Standard 2 year warranty

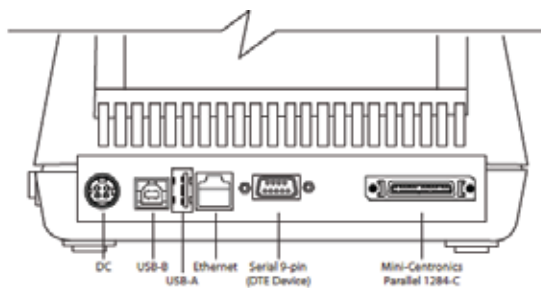

4-inch DLXi (model DBx42-2x85-GxE) shown with USB, Serial, Parallel, and Ethernet



DLXi Thermal Desktop Label Printer

PRODUCT HIGHLIGHTS

Metal vs. Plastic

One touch will tell you that this is not a plastic component printer. We understand the environment and workload these printers endure, which is why we use solid metal framing, metal print mechanism and components to give this printer rugged and industrial strength to stand up to some of the most challenging environments. See why they call it the "Printer You can Stand on."

Interfaces provide versatility

The DLXi offers the most communication interfaces offered on a desktop printer (Serial, Parallel, Ethernet, USB-B and USB-A). The USB-A Port allows it to host a wide variety of devices as well as offering easy to use updates and stored formats.

TECHNICAL SPECIFICATIONS

2 inch Model

4 inch Model

PRINT

Method	Direct Thermal or Thermal Transfer	Direct Thermal or Thermal Transfer
Width (max)	2.2" (56 mm)	4.1" (104 mm)
Length (max)	322" (8179 mm)	322" (8179 mm) at 203 dpi
Speed (max)	5 ips (127 mm/sec)	5 ips (127 mm/sec)
Resolution	203 dpi (8 dpmm)	203 dpi (8 dpmm)

MEDIA

Width	1" - 2.4" (25 mm - 61 mm)	2" - 4.25" (50 mm - 108 mm)
Roll Diameter	4.7" (119 mm)	4.7" (119 mm)
Ribbon Length (TT only)	3150" (80 m)	3150" (80 m)
Indexing	Black bar, notch, and gap	Black bar, notch, and gap
Media Caliper	.005" - .01" (.127 mm - .254 mm)	.005" - .008" (.127 mm - .2 mm)

BARCODES

29 standard bar codes, including Add2, Add5, Codabar, Code39, Code93, Code 128A/B/C, D2of5, I2of5, EAN8/8+, EAN13/13+, EAN128, Maxicode mode 0, MSI/MSI1, PDF417, Plessey, Postnet, UPCA/A+, DataMatrix, Aztec, QR Code, RSS

FONTS

Bitmapped	7 styles with up to 10x10 magnification, variable boldness and spacing
International	Sans serif font in 7 pt. sizes, up to 4x4 magnification, variable boldness and spacing
Scalable Smooth Fonts	3 Ultra Font styles for smooth characters in any size and boldness
Rotations	0, 90, 180, 270 degrees

GRAPHICS

PCX and BMP formats

MEMORY

RAM - 16 MB, Flash - 8 MB

COMMUNICATIONS

Available Combinations	Serial (DB9), USB-A & B	Serial (DB9), Parallel (1284C), USB-A & B
	Parallel (1284C), USB-A & B	Serial (DB9), Parallel (1284C), Ethernet, USB-A & B

ELECTRICAL

Auto-ranging 100-240 VAC, 50-60 Hz, 24 VDC Output

ENVIRONMENTAL

Operates at 41°F to 104°F (5°C to 40°C)

PHYSICAL CHARACTERISTICS

Width (DT/TT)	4.7" (119 mm) / 5.0" (127mm)	6.8" (173 mm) / 6.8" (173 mm)
Height	6.1" (155 mm)	6.1" (155 mm)
Depth	9.4" (238 mm)	9.4" (238 mm)
Weight (DT/TT)	3.1 lbs. (1.41 kg) / 3.9 lbs. (1.77 kg)	3.9 lbs. (1.77 kg) / 4.4 lbs. (2.0 kg)

ACCESSORIES

Standard	Quick Start Guide, USB cable, power supply and cord
Downloads from Web site	Windows drivers, programmer's guide, NiceLabel design software, CPL Programmer's Guide and User's Guide
Optional	Communications cables, label (peeler) dispenser, Ethernet, real-time clock

WARRANTY

Printer 24 months from date of purchase (requires registration and excludes printhead)

PROGRAMMING LANGUAGE

Cognitive Programming Language (CPL), EcPL and ZcPL language emulation



Meets strict European standards, such as RoHS & WEEE compliance for non-toxicity of components and recyclability.

COGNITIVE TPG
Innovation built to last

CognitiveTPG, LLC

950 Danby Road, Suite 200, Ithaca, NY 14850

Toll Free: 800.732.8950 Phone: 607.274.2500 Fax: 607.274.2449

www.CognitiveTPG.com

Copyright 2014 CognitiveTPG. All Rights Reserved.

280-0026-01-0114 Rev C



800 729 0236
www.logiscenter.us



0241 9550 9225
www.logiscenter.de



01 82 88 44 70
www.logiscenter.fr



020 3318 8265
www.logiscenter.co.uk



0720 115814
www.logiscenter.at



02 58 80 583
www.logiscenter.be



911 433 048
www.logiscenter.com



02 4792 1697
www.logiscenter.it



308 800 842
www.logiscenter.pt

About LOGISCENTER

Logiscenter is the leading provider of automatic identification and data capture equipments. Our products include barcode printing and reading devices, mobile computing devices, wireless access points, identification cards, and consumables.

Reasons to work with us

Our customers come first. Our objective is not only selling our products but also holding a long-lasting relationship with our customers, based on the benefits and advantages we create for you and your company.

The best brands. We offer products from the best manufacturers worldwide.

Expert technical support team. Our support staff are experts in the products we sell. But not just the products, they can tell you the best solution for your particular problem or need.

Largest stock. We have a permanent stock of more than 60,000 products.

Same-day shipping. For all orders placed and confirmed before 16:00 on working days.

Best prices. With Logiscenter, you can be sure that you are paying a fair price for your products, we will not overcharge you.

Easy returns. Damaged or defective products can be returned easily, for an exchange or reimbursement.



All Brands Technical Service


Our Brands




Solutions for: Industry • Consumer • Mobility Transportation and Logistics • Retail • Health



Label printers



Barcode readers



Data terminals & PDA



PVC card printers



RFID



Consumables
(labels, ribbons, PVC cards)